



Labelling and Mobility Brochure

RJ Series

In the modern business climate, companies today are striving to differentiate themselves from the competition and are therefore investing in technologies which will increase worker productivity and improve customer satisfaction.

Mobile printers are now being recognised as an integral part of the overall mobile mix, due to the many benefits they offer to field workers and their overall Return On Investment (ROI).

The RJ range of rugged mobile printers from Brother offer the latest connectivity options, functionality and accessories which stand up to the rigours of even the most extreme environments.



RJ series range summary

| | | | | | | | | | | |
|------------------|-----------------|----------------|----------------|----------------|----------------|-----------------|-----------------|------------------|------------------|------------------|
| RJ Series | RJ-2035B | RJ-2030 | RJ-2050 | RJ-2140 | RJ-2150 | RJ-3035B | RJ-3230B | RJ-3250WB | RJ-4230B | RJ-4250WB |
| | 2 Inch (54mm) | | | | | 3 Inch (76.2mm) | | | 4 Inch (101.6mm) | |

MEDIA TYPES

| | | | | | | | | | | |
|----------------|---|---|---|---|---|---|---|---|---|---|
| Receipt | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Labels | | | | ● | ● | | ● | ● | ● | ● |

PRINTING

| | | | | | | | | | |
|----------------------------|--------------|-----------|--|--|--------------|-----------|--|-----------|--|
| Print speed | 101.6mm /sec | 152mm/sec | | | 101.6mm /sec | 127mm/sec | | 127mm/sec | |
| Resolution | 203dpi | | | | 203dpi | | | 203dpi | |
| Max. print width(s) | 48mm | 54mm | | | 72mm | 80mm | | 104mm | |

CONNECTIVITY

| | | | | | | | | | | |
|---------------------|--------------------|---|---|---|---|--------------------|---|--------------------|--------------------|---|
| USB | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Serial | | | | | | | ● | ● | ● | |
| Wireless LAN | | | ● | ● | ● | | | ● | | ● |
| Bluetooth | ● | ● | ● | | ● | ● | ● | ● | ● | ● |
| AirPrint | | | ● | ● | ● | | | ● | | ● |
| MFi | ● | | ● | | ● | ● | ● | ● | ● | ● |
| NFC | Yes (passive only) | | | | | Yes (passive only) | | Yes (passive only) | Yes (passive only) | |

OTHERS

| | | | | | | | | | |
|------------------------------|----------------------------|---------------------------|--|---------------------------|-----------------------------|-----------------------------|--|---------------------------|--|
| IP Rating | IP42 | IP54 | | | IP42 | IP54 | | IP54 | |
| Drop protection | 1.8 metres | 2.5 metres | | | 1.8 metres | 2 metres | | 2.1 metres | |
| Weight (with battery) | 215g | 465g | | 545g | 375g | 807g | | 850g | |
| Dimensions (mm) | 79(w) 36.5(h) 116(d) | 122(w) 57(h) 100(d) | | 151(w) 73(h) 100(d) | 105(w) 49.5(h) 116(d) | 117(w) 77 (h) 180 (d) | | 153(w) 68(h) 159(d) | |

Retail

Improve workforce efficiency by printing receipts and labels on demand, whilst at the same time offer greater customer engagement and satisfaction.

Applications include:

- Shelf edge labels
- "Queue busting" receipt printing
- Mark down or discount labels




Field Service / Sales

The deployment of a mobile print solution offers increased productivity courtesy of reduced administrative duties, and enhanced customer satisfaction by providing immediate documentation of chargeable work carried out. Differentiate your brand from the competition by empowering field technicians with Brother mobile print solutions to deliver higher levels of customer service whilst at the same time increasing operational efficiencies.

Applications include:

- Receipts and invoices
- Repair estimates
- Statements of work
- Work orders
- Estimates and quotations
- Maintenance and service reports

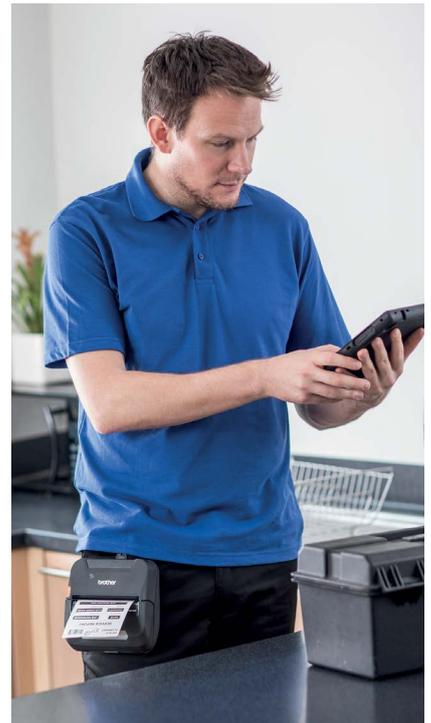


Logistics / Direct Store Delivery

As companies look for ways to increase revenue, increase profitability and improve their customer relations, rugged tablets and mobile handheld devices along with customised software help automate many of the manual delivery tasks that are routinely performed every day. Leaving a printed output at the point of delivery enables field workers to confirm and complete transactions on site, and provide customers with professional looking documents.

Applications include:

- Sales orders and confirmations
- Returned goods receipts and labels
- Customer receipts
- Delivery receipts

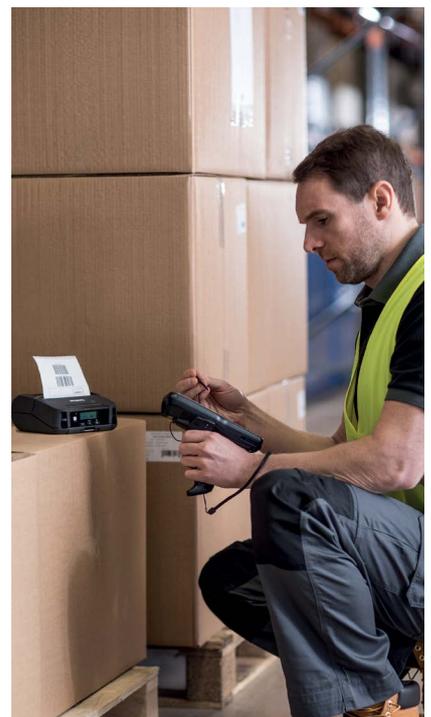


Public Safety / Emergency Services

Brother RJ mobile printers help increase operational efficiency by allowing law enforcement officers and emergency staff to document and report incidents more accurately and efficiently, at the point of interaction. With their rugged design, fast print speed and reliable operation, they offer a competitive combination of performance and features which provide benefits to officers printing tickets, parking violations, and much more.

Applications include:

- Parking violations
- Recording of accidents and crime scenes
- Electronic citations and fines
- Warning Notices

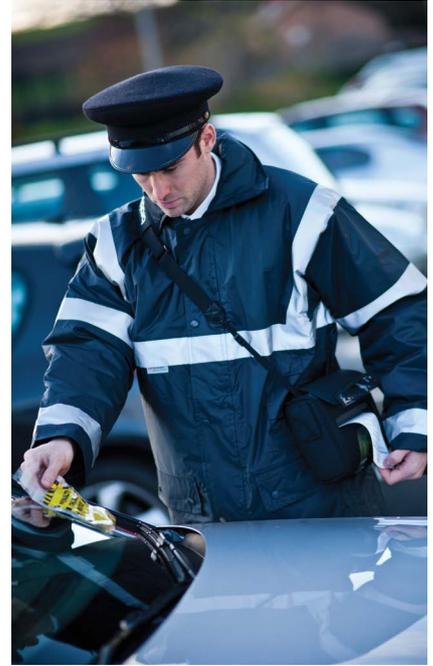

Manufacturing / Warehousing

Efficient manufacturing, warehouse operations and worker productivity are critical to the success of many companies. Using wireless connectivity, the Brother RJ mobile printer range provides workers with the ability to print barcode labels on-demand, at the point of application. This saves time and reduces potential errors caused by mislabelling.

Applications include:

- Work-in-progress labels
- Bin and shelf labels
- Shipping and despatch labels
- Inventory pick and return tickets



RJ2 Series



RJ3 Series



RJ4 Series

Software Support/Features

Brother provides all the necessary tools required for software developers to integrate printing into their mobile applications. Printer drivers are available for Windows OS, and Software Development Kits can be provided to support Windows Mobile*, Android and iOS operating systems.




Template Mode

Design the required document on your Windows PC, including logos and barcodes. Once transferred and stored in the printer's memory, the template can be recalled and any data replaced, before printing with just a few short commands.



AirPrint* and MFi* support

Easily connect to, and print from Apple devices thanks to AirPrint and MFi support.

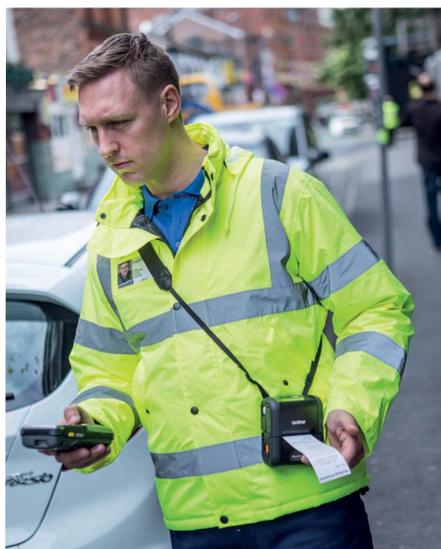

Bluetooth Imaging Protocol*

Create jpeg files from within your application, then send directly to the printer using Bluetooth wireless connectivity.



Printer Commands*

With support for ZPL II emulation, CPCL emulation in addition to Brother ESC/P commands, developers can easily integrate mobile printing into existing legacy systems.



* Check model compatibility



Accessories and Print Supplies

2 Inch (54mm)

| <i>RJ Series</i> |  |  |  |  |  |
|--|---|---|--|---|---|
| | RJ-2035B | RJ-2030 | RJ-2050 | RJ-2140 | RJ-2150 |
| Li-ion rechargeable battery | PA-BT-008 | PA-BT-003 | PA-BT-003 | PA-BT-003 | PA-BT-003 |
| 12v car adapter (in-car socket) | PA-CD-001CG | PA-CD-600CG | PA-CD-600CG | PA-CD-600CG | PA-CD-600CG |
| 12v car adapter (permanently wired) | PA-CD-600WR | PA-CD-600WR | PA-CD-600WR | PA-CD-600WR | PA-CD-600WR |
| Single battery charger | PA-BC-002 | PA-BC-002 | PA-BC-002 | PA-BC-002 | PA-BC-002 |
| 1-Bay Cradle Charger | PA-CR-003 | N/A | N/A | N/A | N/A |
| 4-Bay Cradle Charger | PA-4BC-001 | N/A | N/A | N/A | N/A |
| AC adapter | Included in carton | PA-AD-600A | PA-AD-600A | PA-AD-600A | PA-AD-600A |
| Printer Mounting Kit | N/A | N/A | N/A | N/A | N/A |
| Shoulder Strap | PA-SS-001 | PA-SS-4000 | PA-SS-4000 | PA-SS-4000 | PA-SS-4000 |
| Roll Holder | N/A | N/A | N/A | N/A | N/A |

3 Inch (76.2mm)

4 Inch (101.6mm)

RJ Series



RJ-3035B



RJ-3230B



RJ-3250WB



RJ-4230B



RJ-4250WB

Li-ion rechargeable battery

PA-BT-009

PA-BT-006

PA-BT-006

PA-BT-006

PA-BT-006

12v car adapter (in-car socket)

PA-CD-001CG

PA-CD-600CG

PA-CD-600CG

PA-CD-600CG

PA-CD-600CG

12v car adapter (permanently wired)

PA-CD-600WR

PA-CD-600WR

PA-CD-600WR

PA-CD-600WR

PA-CD-600WR

Single battery charger

PA-BC-005

PA-BC-003

PA-BC-003

N/A

N/A

1-Bay Cradle Charger

PA-CR-004

PA-CR-005

PA-CR-005

N/A

N/A

4-Bay Cradle Charger

PA-4BC-002

PA-4CR-003

PA-4CR-003

N/A

N/A

AC adapter

Included in carton

PA-AD-600A

PA-AD-600A

PA-AD-600A

PA-AD-600A

Printer Mounting Kit

N/A

N/A

N/A

PA-CR-002

PA-CR-002

Shoulder Strap

PA-SS-001

PA-SS-4000

PA-SS-4000

PA-SS-4000

PA-SS-4000

Roll Holder

PA-RH-002

Yes

Yes

N/A

N/A

Features & Specifications

2 Inch (54mm)

RJ-2035B

RJ-2030

RJ-2050

RJ-2140

RJ-2150

| Printing / Media | | | | | |
|--|--|---|--|--|-------------------|
| Printing technology | Direct thermal | | | | |
| Print resolution | 203dpi | | | | |
| Print speed* | Max 101.6mm/second (4ips) | Maximum 152mm/sec (6ips) | | | |
| Maximum print width | 4mm | 54mm max for all models | | | |
| Maximum print length | 2794mm | 1000mm | | | |
| Media sensor type | Reflective | | | Transmissive / Reflective | |
| Tear bar | Yes | | | | |
| Media types | Receipt paper | | | Label rolls / Receipt paper | |
| Receipt width | 58mm max | | | | |
| Receipt paper thickness | 2.3-3.0mils (0.06-0.10mm) | 2.3-3.5 mils (0.058-0.090mm) | | | |
| Label width | - | | | 55mm | |
| Label thickness | - | | | 3.1-6.7 mils (0.080-0.170mm) | |
| Roll diameter | 30mm max | 40mm max | | 60mm max | |
| Core diameter | 10.2mm | | | | |
| Interface | | | | | |
| Type | Battery status x3, Printer status x1, RF connection x1, 1 feed/pause button 1 power button | | Backlit monochrome LCD | | |
| Connectivity | | | | | |
| USB | USB version 2.0 full-speed (mini-B connector) | | | | |
| USB host capability | - | | | | |
| Bluetooth | Bluetooth 5.0 | Bluetooth 2.1+EDR | | | Bluetooth 2.1+EDR |
| Bluetooth profiles | SPP (Serial Port Profile - low energy) GATT (low energy) iAP supported | SPP (Serial Port Profile) OPP (Object Push Profile) BIP (Basic Imaging Profile) HCRP (Hard Copy Cable Replacement Profile) | SPP (Serial Port Profile) OPP (Object Push Profile) BIP (Basic Imaging Profile) HCRP (Hard Copy Cable Replacement Profile) iAP supported | SPP (Serial Port Profile) OPP (Object Push Profile) BIP (Basic Imaging Profile) HCRP (Hard Copy Cable Replacement Profile) iAP supported | |
| MFfi support | Yes | - | Yes | - | Yes |
| Wireless LAN | - | | IEEE802.11b/g/n Infrastructure mode: [b/g/n] Adhoc mode: [b/g/n] Wireless direct mode: [g/n] | | |
| Wireless LAN security (AdHoc mode) | - | | None/WEP | | |
| Wireless LAN security (Infrastructure mode) | - | | None/WEP64/WEP128 Common key authentication (WEP) WPA/WPA2-PSK (TKIP+AES) LEAP (CKIP) EAP-FAST (TKIP/AES) PEAP (TKIP/AES) *3 EAP-TLS (TKIP/AES) EAP-TTLS (TKIP/AES) | | |
| Wireless LAN security (wireless direct mode) | - | | WPA2-PSK (AES) | | |
| NFC | Yes (passive) | - | | | |
| Software / Firmware | | | | | |
| Operating system support | Microsoft® Windows® 7/8.1/10, Server 2012/R2, 2016, 2019, Mac OS 10.11 or greater, Linux deb/rpm | Microsoft® Windows Vista®/ Windows® 7 / Windows® 8 Windows® 8.1 / Windows® 10 Android 4.0.3 or higher (SDK) (visit http://support.brother.com for latest OS support) | Microsoft® Windows Vista®/ Windows® 7 / Windows® 8 Windows® 8.1 / Windows® 10 Android 4.0.3 or higher (SDK) iOS 6 or higher (SDK) (visit http://support.brother.com for latest OS support) | | |
| Microsoft® WHQL certified drivers | Yes | | | | |
| SDK Availability visit brother.com.au/service-and-support/software-development-kit.html | Microsoft® Windows® 7/8.1/10, Android 4.0.3 or later, IOS 7.0 or later, Requires 3rd party app development using brother SDK | b-PAC (for Windows) Android 4.0.3 or higher (SDK) | b-PAC (for Windows) Android 4.0.3 or higher (SDK) iOS 6 or higher (SDK) | | |
| Supported printer commands | EPL2,ZPL2, FBPL, CPCL, | ZPLII emulation, CPCL emulation, ESC/P, P-touch Template, Raster | | | |

RJ-2035B

RJ-2030

RJ-2050

RJ-2140

RJ-2150

| Software / Firmware | | | |
|--------------------------------------|--|---|----------------------------|
| Barcode symbologies | <p>Linear: CODE 39, ITF(I-2/5), EAN-8, EAN-13, UPC-A, UPC-E, UPC/EAN EXTENSION, CODABAR, CODE128, GS1-128(UCC/EAN 128), POSTNET, GS1 Databar(Omnidirectional/ Truncated/ Stacked/Stacked Omnidirectional/ Limited/Expanded/Expanded Stacked), CODE93, MSI/ Plessey, Intelligent Mail Barcode</p> <p>2-dimensional: QR Code (model 1, model 2, micro QR), Maxi code, PDF417 (Standard, Truncate) MicroPDF417, Data Matrix (Square, Rectangular) AztecCode</p> | <p>CODE39 / ITF (I-2/5) / EAN-13 / EAN-8 / UPC-A / UPC-E / CODABAR / CODE128 / GS1-128 (UCC/EAN-128) / RSS symbols / CODE93 / POSTNET / UPC/EAN EXTENSION / MSI / QR Code (model 1, model 2, micro QR) / PDF417 (Standard, Truncate, MicroPDF417) / Data Matrix (ECC200 Square, ECC200 Rectangular) / MaxiCode / Aztec</p> | |
| Internal fonts | <p><P-touch Template> Outline:4: Gothic, Letter Gothic Bold, Helsinki, Brussels MAX 400dot <ESC/P><P-touch Template> BMP:3 Gothic, Letter Gothic Bold, Helsinki 3size<16,24,32dot> Outline:4: Gothic, Letter Gothic Bold, Helsinki, Brussels MAX 400dot</p> | <p><ESC/P commands> Bitmap fonts: Gothic, Letter Gothic Bold, Helsinki / Font sizes: 16, 24, 32 dots / Outline fonts: Gothic, Letter Gothic Bold, Helsinki / Font sizes: 400 dots (maximum) <P-touch Template commands> Outline fonts: Gothic, Letter Gothic Bold, Helsinki / Font sizes: 400dots (maximum)</p> | |
| Label editing software | Label Editing Software P-Touch Editor 5.4, BarTender Ultra Lite Edition ¹ | | |
| Memory | | | |
| RAM | 32MB | | |
| Flash | 16MB | 32MB (12MB available for template upload) | |
| Environmental | | | |
| Drop protection | 1.8 metres- multiple drops (under Brother standard environment) | 2.5 metres - multiple drops (under Brother standard environment) | |
| Sealing | IP42 | IP54 | |
| Operating temperature | Operating: -15°C to +50°C Charging: 0°C to +40°C | Operating: -10°C to +50°C / Charging: 0°C to +40°C | |
| Operating humidity | 10%-90% / Maximum web bulb: +27C (no condensation) | | |
| Storage temperature | -30°C to +70°C | -20°C to +60°C for 120 hours maximum | |
| Storage humidity | +45°C @ 95% for 120 hours maximum | | |
| Power | | | |
| Battery | Rechargeable Li-ion (7.4V) | Rechargeable Li-ion (7.2V) | |
| AC adapter (optional accessory) | 100-240V AC (50/60Hz) to 15V DC (only for charging) | | |
| Car adapter (optional accessory) | 12-24V | 12V DC (only for charging) | |
| Cradle charger (optional accessory) | 1-bay Cradle Charger | - | |
| Battery charger (optional accessory) | 4-bay Battery Charger | - | |
| Shoulder strap (optional accessory) | Yes | - | |
| Weights / Dimensions | | | |
| Dimensions | 79(w) x 116(d) x 36.5(h) | 122(w) x 57(h) x 100(d) mm | 151(w) x 73(h) x 100(d) mm |
| Weight (including battery) | 215g | 465g | 545g |
| Included items | | | |
| Included items | Printer, Li-ion battery, Belt clip, Power Adaptor, Documentation | Printer, Li-ion battery, Belt clip, Documentation | |

¹Brother standard test environment ¹Sold separately

Features & Specifications

3 & 4 Inch (76.2mm & 101.6mm)

RJ-3035B | RJ-3230B | RJ-3250WB | RJ-4230B | RJ-4250WB

| Printing / Media | | | | |
|---|--|---|--|--|
| Printing technology | Direct thermal | | | |
| Print resolution | 203dpi | | | |
| Print speed* | Max 101.6mm/sec (4ips) | Maximum 127mm/second (5ips) | | |
| Maximum print width | Up to 72mm | | 104mm | |
| Maximum print length | 2794mm | Up to 3000mm | | |
| Media sensor type | Reflective | Transmissive / Reflective | | |
| Tear bar | Yes | | | |
| Media types | Receipt paper | Label rolls / Receipt paper | | |
| Receipt width | 80mm | Up to 72mm | 113mm | |
| Receipt paper thickness | 2.3-5.2 mil (0.06-0.16 mm) | | 2.2-3.5mils (0.058-0.090mm) | |
| Label width | - | 80mm | 113mm | |
| Label thickness | - | 3.1-6.6 mil (0.080-0.170mm) | | |
| Roll diameter | 40mm max | 80mm | 58mm max | |
| Core diameter | 10.2mm (receipt) | 12.7mm-13.0mm or 19.0mm (receipt) / 25.4mm (labels) | | 12.7mm (receipt) / 25.4mm (labels) |
| Interface | | | | |
| Type | Battery status x3, Printer status x1, RF connection x1, 1 feed/pause button 1 power button | Colour | Monochrome | |
| Connectivity | | | | |
| USB | USB version 2.0 (high speed, micro) | USB Ver.2.0 (Full Speed) (Type C) USB Type C w/charging | USB version 2.0 full-speed (mini-B connector) | |
| Bluetooth | Bluetooth version 5.0 | Bluetooth version 5.0 | Bluetooth 4.2 | |
| Bluetooth profiles | SPP (Serial Port Profile - low energy), GATT (low energy), iAP supported | SPP (Serial Port Profile), OPP (Object Push Profile) HCRP (Hard Copy Cable Replacement Profile) iAP supported | | |
| MFfi support | Yes | | | |
| Wireless LAN | - | Wireless LAN (5GHz) IEEE 802.11 a/n, 802.11i, 802.11r, WPS2.0 (Infrastructure Mode) Wireless LAN(2.4GHz) IEEE 802.11 b/g/n, 802.11i, 802.11r, WPS2.0 (Infrastructure Mode) IEEE 802.11 g/n, 802.11d, 802.11i (Wireless Direct mode) | - | Wireless LAN IEEE802.11a/ b/g/n (Infrastructure mode:[a/b/ g/n] / Wireless direct mode:[g/n]) |
| Wireless LAN security (AdHoc mode) | - | | | None/WEP |
| Wireless LAN security (Infrastructure mode) | - | | | Authentic method (encryption scheme) *Infrastructure mode -Open system(None/WEP64/WEP128) -Common key authentication (WEP) WPA/WPA2-PSK (TKIP+AES) • EAP-FAST (TKIP/AES) • PEAP (TKIP/AES) *3 • EAP-TLS (TKIP/AES) • EAP-TTLS (TKIP/AES) Authentic method (encryption scheme) *Wireless direct mode -WPA2-PSK (AES) |
| Serial | - | | RS-232C *Using original serial cable | |
| NFC | Yes (passive) | | | |
| Software / Firmware | | | | |
| Operating system support | Microsoft® Windows 7/8.1/10, Server 2012/R2, 2016, 2019, Mac OS 10.11 or greater, Linux deb/rpm | Microsoft® Windows 7/8.1/10, Server 2012/R2, 2016, 2019, Mac OS 10.11 or greater, Linux deb/rpm | Windows 7, Windows 8, Windows 8.1, Windows 10 | Windows 7, Windows 8, Windows 8.1, Windows 10, Windows Server 2008/ 2008R2, Windows Server 2012 / 2012 R2/ 2016 |

RJ-3035B | RJ-3230B | RJ-3250WB | RJ-4230B | RJ-4250WB

| Software / Firmware | | | |
|--|---|--|--|
| Microsoft® WHQL certified drivers | - | Yes | |
| SDK Availability visit brother.com.au/service-and-support/software-development-kit.html | Microsoft® Windows 7/8/8.1/10, Android 4.0.3 or later, IOS 7.0 or later, Requires 3rd party app development using Brother SDK. | Android 6 or later IOS 10 or later | b-PAC (for Windows) MPrint&PocketJetSDK for Windows Mobile® (for Windows CE 5.0 / 6.0, Windows Mobile 5.0 / 6.x) MPrint&PocketJetSDK for .NET Compact Framework (for Windows CE 5.0 / 6.0, Windows Mobile 5.0 / 6.x) Brother Print SDK for Android™ (for Android) Brother Print SDK for iPhone/iPad (for iOS) |
| Supported printer commands | EPL2, ZPL2, FBPL, CPCL | ZPLII emulation, CPCL emulation, ESC/P, P-touch Template, Raster | |
| Barcode symbologies | Linear: CODE 39, ITF(I-2/5), EAN-8, EAN-13, UPC-A, UPC-E, UPC/EAN EXTENSION CODABAR, CODE 128, GS1-128(UCC/EAN 128), POSTNET, GS1 Databar (Omnidirectional/Truncated/Stacked/Stacked Omnidirectional/Limited/Expanded/Expanded Stacked), CODE93, MSI/Plessey, Intelligent Mail Barcode 2-dimensional: QR Code (model 1, model 2, micro QR), Maxi code, PDF417 (Standard, Truncate) MicroPDF417, Data Matrix (Square, Rectangular), AztecCode | Linear: CODE39, ITF(I-2/5), EAN-8(JAN8), EAN-13(JAN13), UPC-A, UPC-E, CODABAR(NW-7), CODE128, GS1-128(UCC/EAN-128), POSTNET, GS1 DataBar (RSS), CODE93, UPC/EAN EXTENSION, MSI, Intelligent Mail Barcode, Intelligent Mail Barcode, CODE93, UPC/EAN EXTENSION, MSI, Intelligent Mail Barcode, Industrial 2-of-5, Standard, 2-of-5, CODE93, MSI 2-dimensional: QR Code, PDF417, MaxiCode, Aztec, Micro QR Code, MicroPDF417, DataMatrix, GS1 Databar Composite, Micro QR Code, MicroPDF417, DataMatrix, GS1 Databar Composite, MicroPDF417, DataMatrix GS1 Databar Composite | Linear: CODE 39, ITF(I-2/5), EAN-8, EAN-13, UPC-A, UPC-E, UPC/EAN EXTENSION CODABAR, CODE 128, GS1-128(UCC/EAN 128), POSTNET, GS1 Databar(Omnidirectional/Truncated/Stacked/Stacked Omnidirectional/Limited/Expanded/Expanded Stacked), CODE93, MSI/Plessey Intelligent Mail Barcode 2-dimensional: QR Code (model 1, model 2, micro QR), Maxi code, PDF417 (Standard, Truncate), MicroPDF417, Data Matrix(Square, Rectangular) AztecCode |
| Label editing software | BarTender Ultra Lite Edition ¹ | P-touch Editor 5.4 BarTender (for label print)* NiceLabel (for label print)* Teklynx (for label print)* SAP (for label print) *BarTender, NiceLabel, CODESOFT are not supported yet. Printer driverdevelopment will start after the product launch. | P-Touch Editor 5.4, BarTender Ultra Lite Edition ¹ |
| Memory | | | |
| RAM | 32MB | 256MB | |
| Flash | 16MB | 128 MB | 64MB (6MB usable for template transfer) |
| Environmental | | | |
| Drop protection | 1.8 metres | 2 metres | 2.1 metres |
| Sealing | IP42 | P54 | |
| Operating temperature | Operating: -15°C to +50°C | Operating: -20°C to 55°C -10°C to 35°C (with peeler) 10°C to 30°C (with linerless) / Charging: 0°C to 40°C | Operating: -20°C to +55°C / Charging: 0°C to +40°C |
| Operating humidity | 10% to 90 non-condensing | 10% to 90% (no condensation) 50% (with peeler/linerless) | 10% to 90% (no condensation) |
| Storage temperature | -30°C to +70°C | -20°C to 60°C | -20C to +60C |
| Storage humidity | 5% to 90% non-condensing | 10% to 90% (no condensation) | 10% to 90% (no condensation) |
| Power | | | |
| Battery | Rechargeable Li-ion (7.4V) | 3000 mAh Li-ion Battery (Smart Battery) | Rechargeable Li-ion (7.2V) |
| AC adapter (optional accessory) | 110/220V AC (50/60Hz) to 15V DC (only for charging) | | |
| Car adapter (optional accessory) | 12-24V | 12V DC (only for charging) | 12V DC |
| Cradle charger (optional accessory) | 1-bay Cradle Charger | 1-bay & 4-bay Battery Charger | - |
| Battery charger (optional accessory) | 1-bay & 4-bay Battery Charger | Yes | - |
| Roll holder (optional accessory) | Yes | Yes | - |
| Shoulder strap (optional accessory) | Yes | Yes | - |
| Weights / Dimensions | | | |
| Dimensions | 105(w) x 49.5(h) x 116(d) | 117mm (W) x 180mm (D) x 77mm (H) | 153(w) x 68(h) x 159(d) mm |
| Weight (including battery) | 375g | 807g | 610g (without battery) / 850g (with battery) |
| Included items | | | |
| Included items | Printer, Li-ion battery (PA-BT-009), Belt clip, Power Adaptor, Documentation | Belt clip, Roll holder, Li-ion smart battery, Media roll holders, Documentation | Printer, Belt clip, Adjuster guide locks, Documentation |

¹Brother standard test environment ¹Sold separately

brother

at your side



www.brother.com.au

"Made for iPod," "Made for iPhone," and "Made for iPad" mean that an electronic accessory has been designed to connect specifically to iPod, iPhone, or iPad, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod, iPhone, or iPad may affect wireless performance.

iPad, iPhone and iPod are trademarks of Apple Inc., registered in Australia and other countries.

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Brother Industries, Ltd. is used under license.



youtube.com/user/BrotherAU/videos



linkedin.com/company/brother-international-australia/

Brother International (Aust) Pty Ltd